

# LEAK REPAIR LEVEL 3

**UNPRESSURIZED WITH STEAM OR CHEMICALS**

Repair Kit for Pipes with Steam, Condensate and Chemical Products

## Quick Leak Repair Kit

- Ready-to-use kit
- Repairs leak in 1 hour
- Withstand pressure up to 400 psi (28 kg/cm<sup>2</sup>)
- Withstand temperature up to 230°C (446°F)
- Calculated under ASME PCC2

### Kit

- 1 Kit of Taurus Fiberglass Tape
- 1 Ballistic Reinforced MESH
- 1 Kit of Taurus T58HT
- 1 Application tool kit
- 1 Pair of latex gloves

## REPAIR KIT SIZES

ITEM NUMBER	NOMINAL PIPE DIAM.
TMK 0.5-1.5 KIT	1/2"
	3/4"
	1"
	1.25"
	1.5"


ITEM NUMBER	NOMINAL PIPE DIAM.
TMK 2-3 KIT	2"
	2.5"
	3"
TMK 4-5 KIT	4"
	5"

ITEM NUMBER	NOMINAL PIPE DIAM.
TMK 6 KIT	6"
TMK 8 KIT	8"
TMK 10 KIT	10"
TMK 12 KIT	12"
TMK 14 KIT	14"
TMK 16 KIT	16"

ITEM NUMBER	NOMINAL PIPE DIAM.
TMK 18 KIT	18"
TMK 20 KIT	20"
TMK 22 KIT	22"
TMK 24 KIT	24"
TMK 30 KIT	30"
TMK 36 KIT	36"


## APPLICATION PROCEDURE

**SURFACE PREPARATION** - Clean the surface mechanically (desirable St3 and roughness 60 to 80 microns).

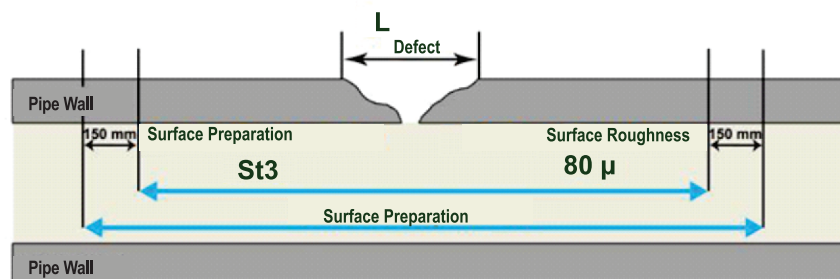


## APPLICATION PROCEDURE


**ARREST LEAK** - Apply the MESH with TAURUS T58HT and on the leakage area.

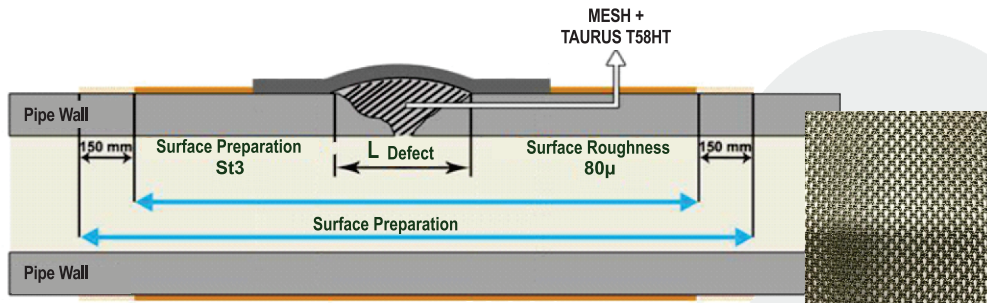


**APPLY THE PUTTY** - Mix the two components of the putty TAURUS T58HT. Apply on the repair area covering it completely.

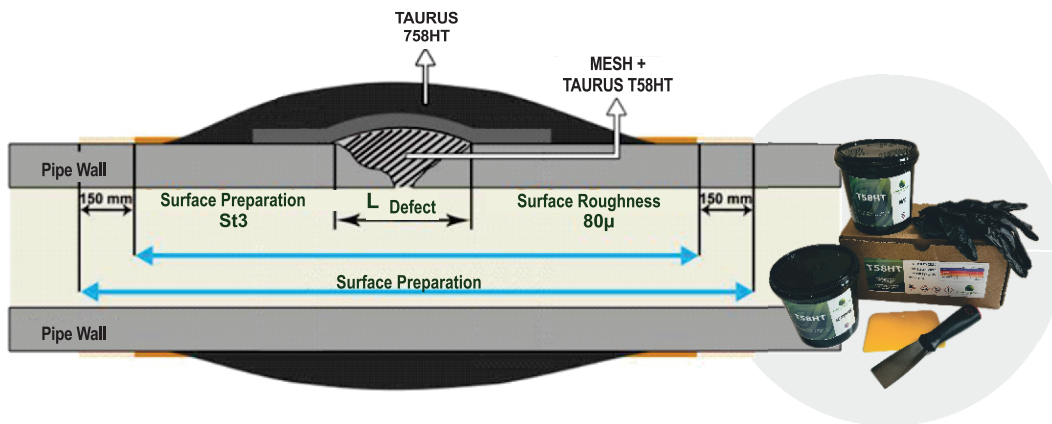


**THE REINFORCEMENT** - Apply all rolls of Fiberglass Tape coming in the kit.




Immerse Wrap Steel Fiberglass Tape into water




Wrap the Wrap Steel Fiberglass Tape above the repair area as tightly and evenly as possible, using the entire roll



Discard the plastic tube at the end of the roll



Wet gloves in water and quickly compress the bubbling resins back into the fiberglass wrap until all bubbling has stopped



Repair completed with smooth and hard ivory appearance